

LWIR Camera

ContraTech

LEO Series Long Wave Infrared Cameras



CONTRASTECH

ContraTech LEO Series

Long Wave Infrared Cameras

For more info, pls visit:
www.contrastech.com

Brief Introduction

With the wide application and popularization of machine vision technology, more and more higher requirements proposed by industrial applications, like high precision measurements and high speed inspection. Depend on decade technology accumulation efforts from former cameras, ContraTech has developed a new series cameras - LEO Series which equipped with excellent image sensors, can be more resistant to experimental clamping, better adapt to complex and harsh visual application environments to ensure stable camera output.

LEO series long-wave infrared cameras use high-sensitivity vanadium oxide uncooled detectors with a response band of 8-14 μm , visualize temperature information, measure

temperature characteristics of objects, and meet new application requirements in new energy, auto parts, electronic semiconductors and other industries.

The LEO series of long-wave infrared cameras, all interfaces are standardized and offer the option to provide power and data to the camera via one single cable. The cameras also offer separate input/output ports for triggering or flash control. cover GigE Gigabit Ethernet protocol standards, support GenICam and GigE Vision®, and can seamlessly connect with third-party software such as HALCON and Vision Pro without secondary development.

Main Feature

- Adopts GigE interface and max.transmission distance of 100 meters without relay
- High Sensitivity Uncooled Vanadium Oxide Detector
- Professional SDK secondary development kit
- Seamless access to third-party software platforms or development kits
- Comply with GenICam™ and GigE Vision® standards

Applications

- PV Detection;
- Medical Detection;
- Firefighting;
- Lithium-battery Detection

Specifications



Observation Camera Model	Resolution [H×V pixels]	Frame Rate [fps]	Pixel Size [μm^2]	Sensor	NETD	EFL	M.O.D	Interface
LEO 64006LW-50gm	640 × 512	50	17	Uncooled VOx Detector	<35 mk(F1.0,25°C)	6.3 mm	0.1m	GigE(PoE)
LEO 64015LW-50gm	640 × 512	50	17	Uncooled VOx Detector	<35 mk(F1.0,25°C)	15 mm	0.1m	GigE(PoE)
LEO 64025LW-50gm	640 × 512	50	17	Uncooled VOx Detector	<35 mk(F1.0,25°C)	25 mm	0.25m	GigE(PoE)
LEO 64035LW-50gm	640 × 512	50	17	Uncooled VOx Detector	<35 mk(F1.0,25°C)	35 mm	0.45m	GigE(PoE)
Observation Camera Model	LEO 64006LW-50gm		LEO 64015LW-50gm		LEO 64025LW-50gm		LEO 64035LW-50gm	
Pseudo-color Mode	White Hot, Black Hot, Fusion 1, Rainbow,Fusion 2, Ironbow 1, Ironbow 2, Sepia, Color 1, Color 2, Ice Fire, Rain, Green Hot, Red Hot, Dark Blue							
Image Processing	Supports Brightness, Contrast,Image Detail Enhancement,Digital Noise Reduction (Time Domain, Spatial Domain)							
Image Format	Mono 8/12/14, YUV422_YUYV_Packed							
FOV	88.5° × 73.2°		42.4° × 33.6°		24.6° × 18.5°		17.9° × 14.2°	
Lens Mount	M34*0.75							
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1,and bi-directional custom non-isolated I/O x 1							
Power Input	DC 9-24V, Supporting PoE							
Power Consumption	12V @2.5W							
Driver	LEO Series Camera Software Suite (iDatum) or 3rd party GigE Vision Software							


ContrasTech LEO Series

Long Wave Infrared Cameras


For more info, pls visit:
www.contrastech.com

Dimensions


LEO 64006LW-50gm/LEO 64035LW-50gm

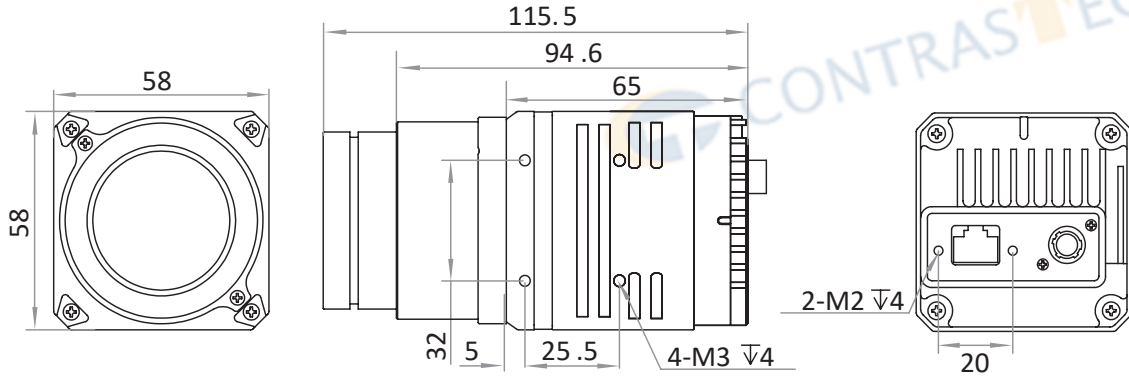

LEO 64015LW-50gm

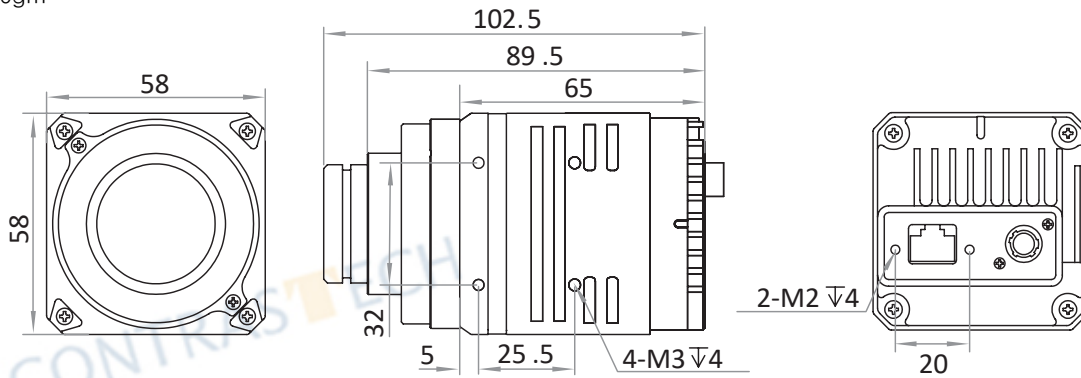

LEO 64025LW-50gm

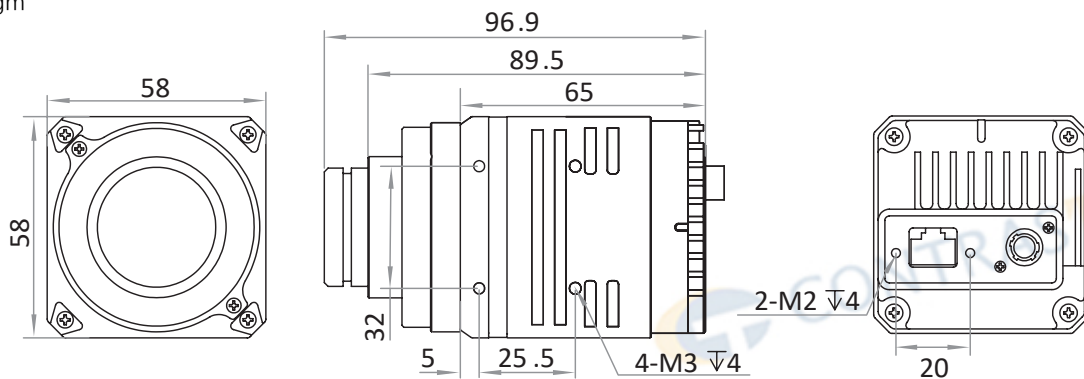

ContraTech LEO Series

Long Wave Infrared Cameras


For more info, pls visit:
www.contrastech.com

Specifications



Thermometric Camera Model	Resolution [H×V pixels]	Frame Rate [fps]	Pixel Size [μm^2]	Sensor	NETD	EFL	M.O.D	Interface
LEO 64006LWT-50gm	640 × 512	50	17	Uncooled VOx Detector	<50 mk(F1.0,30°C)	6.3 mm	0.6m	GigE
LEO 64025LWT-50gm	640 × 512	50	17	Uncooled VOx Detector	<50 mk(F1.0,30°C)	25 mm	0.6m	GigE
Thermometric Camera Model	LEO 64006LWT-50gm			LEO 64025LWT-50gm				
Measuring Range	-20 ~ 150°C or 0 ~ 550°C							
Measurement Accuracy	$\pm 2^\circ \text{C}$ or $\pm 2\%$ of reading							
Measurement Farthest Distance	5 m @ target size $0.1 \times 0.1 \text{ m}^2$							
Pseudo-color Mode	White Hot, Black Hot, Fusion 1, Rainbow, Fusion 2, Ironbow 1, Ironbow 2, Sepia, Color 1, Color 2, Ice Fire, Rain, Green Hot, Red Hot							
Image Processing	Supports Brightness, Sharpness, Gamma Correction							
Image Format	Mono 16/32, YUV422							
FOV	88.5° × 73.2°			-				
Lens Mount	M34*0.75 (lens cannot be replaced)							
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1							
Power Input	DC 9-24V							
Power Consumption	12V @2.8W							
Driver	LEO Series Camera Software Suite (iDatum) or 3rd party GigE Vision Software							

Dimensions

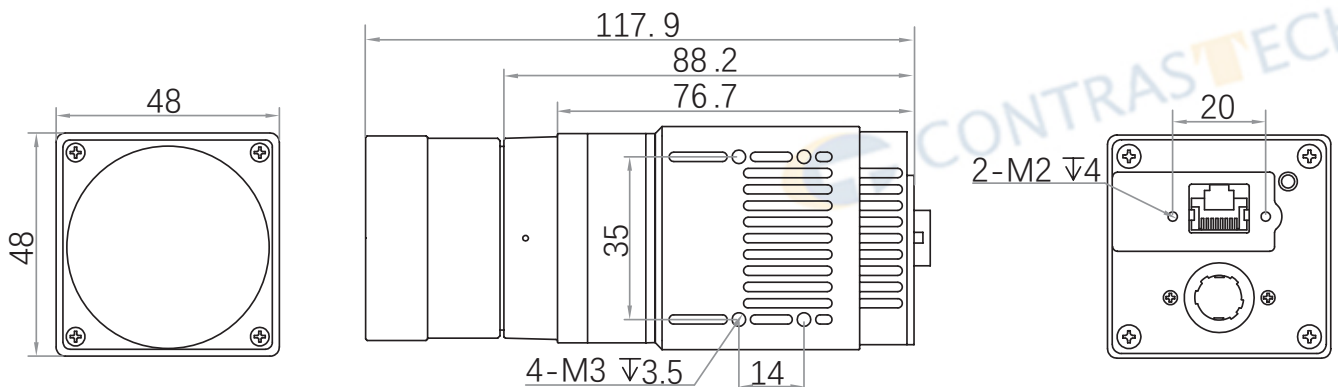

Vision And More Available !

让工业更智能，让视觉更简单！



SWIR Camera
Industrial Camera



Macro Lens
Industrial Lens



Microscope



System Solution
No-programming Software

Company Hangzhou Contrastech Co.,Ltd
Add. Xiyuan 9th Road West Lake District,Hangzhou 310030 China
Tel. +86-571-89712238
Email market@contrastech.com (Market)
support@contrastech.com (Support)
Website www.contrastech.com

Ver.22.04

