


- 12MP resolution @68 fps
- 10GigE, compatible with GigE, supports long-distance data transmission
- Compatible with GigE Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard
- Support Windows
- Up to 1024 MB local memory for burst transmission and retransmission



Applied range • Defect Detection • Surface Patch Detection • Visual Positioning • Size Measuring • QR Code Reading • VR/AR • Logistics


Camera	LEO 12MS-68Tgc
Resolution [H*V]	4096 × 3000
Sensor	Sony IMX253
Sensor Size	1.1"
Sensor Technology	Global, CMOS
Pixel Size [μm]	3.45 × 3.45
Frame Rate [fps]	68
Data Bit	8bit / 10bit / 12bit
Exposure Time	2μs~10s
Dynamic Range	>71dB
Mono/Color	Color
Image Format	Mono 8/10/12,Bayer RG 8/10/10p/12/12p, YUV422Packed,YUV422_YUYV_Packed,RGB 8,BGR 8
Interface	10 GigE
Synchronization	Via hardware trigger、software trigger or free run mode
Programmable Control [ISP]	Image resolution、RGB gain、Exposure time、Contrast ratio、Gamma form、Image rollovers、Raw、LUT、Black level correction
Housing Size [l*w*h]	M58 (With fan):74 × 74 × 72.4 mm (450g) F-Mount (With fan):74 × 74 × 78.4 mm(600g)
Operating Temperature	-30~70 ° C (Storage), 0~50° C (Working)
Lenses Mount	M58, BFL 11.48 mm F-Mount, BFL 46.5mm
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, bi-directional custom non-isolated I/O x 1,RS232 x 1
Power Input	DC 9-24V
Power Consumption	12V @16.5W
Driver	LEO Series Camera Software Suite (iDatum) or 3rd party GigE Vision Software
Operating System	Windows
Conformity	GigE Vision,GenICam

Spectral Response

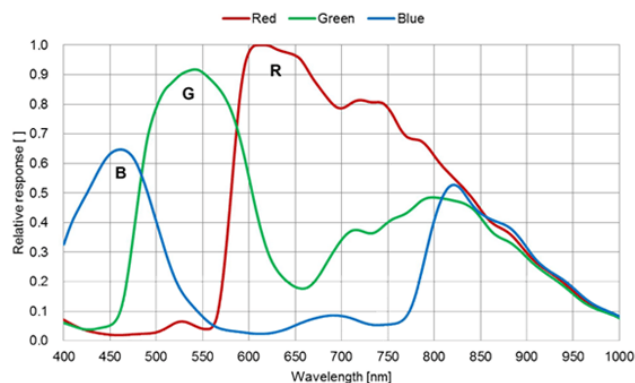

Dimensions

M58(With fan):

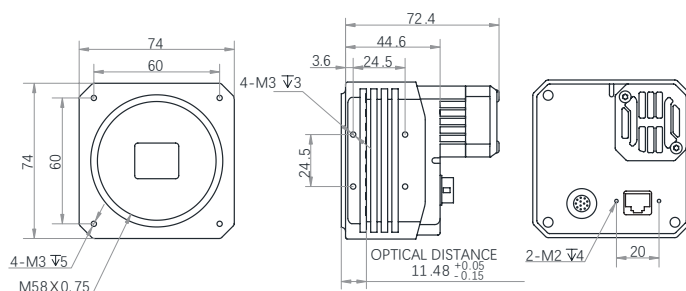

F-Mount(With fan):

