


- 1.3MP @91 fps
- Adopts InGaAs sensor,supports TEC colling
- Supports spectral imaging of 0.4 μm to 1.7 μm
- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Compatible with GigE Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard



Applied range • Analysis of agricultural products quality • Fruit and vegetable sorting • Garbage classification • Glass cover plate
• Hyperspectral applications

Camera	iDatum90GSWC130M
Resolution [H*V]	1280 × 1024
Sensor Type	InGaAs
Sensor	Sony IMX990
Sensor Size	1/2"
Pixel Size [μm]	5 × 5
Frame Rate [fps]	91
Exposure Time	8 μs -0.1 s UltraShort exposure: 3 μs -7 μs
Dynamic Range	56 dB
Image Format	Mono 8/10/10Packed/12/12Packed
Interface	GigE
Synchronization	Via hardware trigger、software trigger or free run mode
Housing Size [l*w*h]	58.0 × 58.0 × 82.0 mm (470g)
Operating Temperature	-30~70 ° C (Storage), -30~50° C (Working)
Lenses Mount	C-Mount
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, bi-directional custom non-isolated I/O x 1 and RS232 x 1
Power Input	DC 9-24V
Power Consumption	12V @11.7W (TEC enabled)
Driver	LEO Series Camera Software Suite (iDatum) or 3rd party GigE Vision Software
Operating System	Windows,Linux
Conformity	GigE Vision,GenICam

Spectral Response

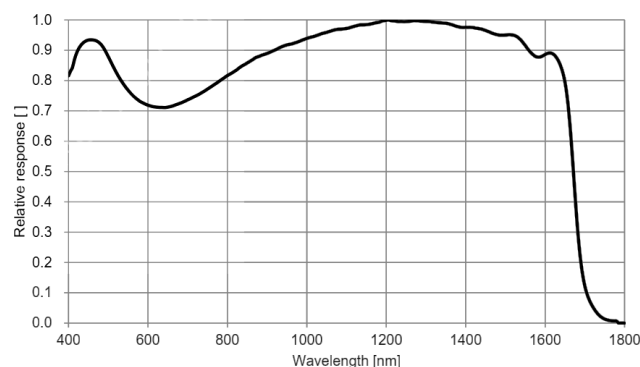

Dimensions

