



Mars25MG-30cm


- 25MP @30 fps
- Compatible with Cameralink protocol and GenICam standard
- Support base/medium/Full/Deca mode
- Support Windows operating platform
- Support DC 24V / PoCL power supply




Applied range • Printing • Textile • Railway • Logistics • Metallurgy • Food • Pharmaceutical • Material sorting

Camera	Mars25MG-30cm
Resolution [H*V]	5120 × 5120
Sensor	Gpixel GMAX0505
Sensor Size	1.1"
Pixel Size [μm]	2.5 × 2.5
Frame Rate [fps]	30
Data Bit	10bit
Exposure Time	35μs~1s
Dynamic Range	>64dB
Mono/Color	Mono
Image Format	Mono8/10
Pixel Clock	34M/51M/68M/85M
Interface	Cameralink
Synchronization	Via hardware trigger、software trigger or free run mode
Programmable Control [ISP]	Image resolution、Exposure time、Gamma form、Image rollovers、Raw、LUT、Black level correction
Housing Size [l*w*h]	29.0 × 44.0 × 58.0 mm (100g)
Operating Temperature	-30~80 ° C (Storage), -30~50° C (Working)
Lenses Mount	C-Mount
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1
Power Input	PoCL, DC 9-24V
Power Consumption	12W@4.0W
Driver	Mars Series Camera Software Suite (iCentral) or 3rd Party Cameralink Protocol Software
Operating System	Windows
Conformity	Cameralink, GenICam

Spectral Response

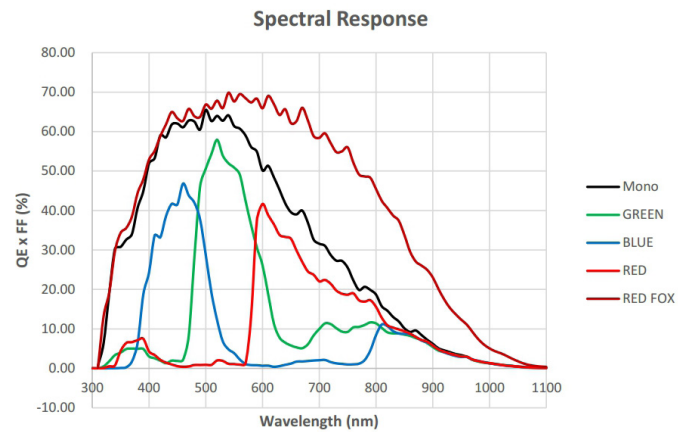

Dimensions

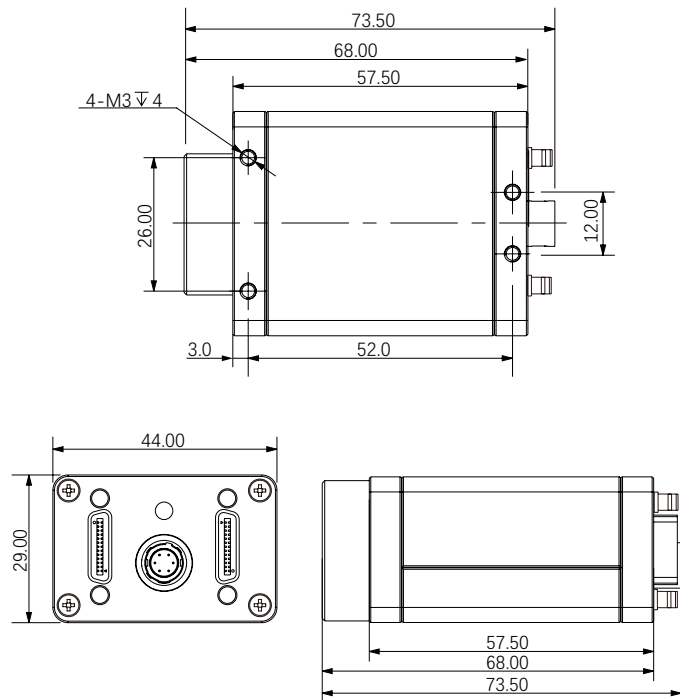

No.8, Xiyuan 9th Road West Lake District, Hangzhou 310030 China
 Tel: 86-571-89712238 Web: www.contrasttech.com
 Email: market@contrasttech.com