



- 12MP @188 fps
- CoaXPress uses CXP-6, theoretical bandwidth 4 x 6.25Gbps
- Compatible with CoaXPress Protocol, GenICam Standard, and the third-party software based on these protocol and standard
- Support Windows operating platform
- Support PoCXP power supply and DC 24V power supply

Applied range • Printing • Textile • Railway • Logistics • Metallurgy • Food • Pharmaceutical • Material sorting



Camera	Mars12MC-188xm/xc-M42
Resolution [H*V]	4096 x 3072
Sensor	CMV12000
Pixel Size [μm]	5.5 x 5.5
Frame Rate [fps]	188
Data Bit	12bit
Exposure Time	50 μs ~5s
Dynamic Range	60dB
Mono/Color	Mono / Color
Image Format	Mono: Mono8/10/12 Color: BayerGR8/10/12, BayerRG8/10/12, BayerGB8/10/12, BayerBG8/10/12
Interface	CoaXPress
Synchronization	Via hardware trigger, software trigger or free run mode
Programmable Control [ISP]	Image resolution, RGB Gain, Exposure time, Gamma form, Image rollovers, Raw, LUT, Black level correction
Housing Size [l*w*h]	80.0 x 80.0 x 47.0 mm (720g)
Operating Temperature	-30~80 ° C (Storage), -30~50° C (Working)
Lenses Mount	M42*1
Digital I/O	6-pin Hirose interface: Configurable input and output x 3;
Power Input	PoCXP / DC 24V
Power Consumption	24V@ \approx 15W
Driver	Frame Grabber control software compliant with CoaXPress protocol
Operating System	Windows
Conformity	CoaXPress, GenICam

Spectral Response

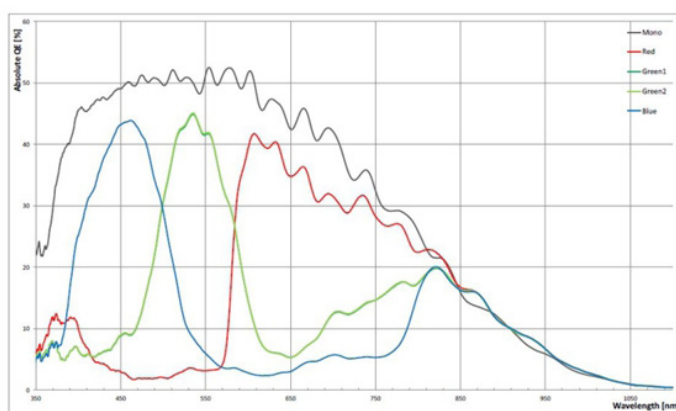

Dimensions

