



- 1.7MP @66 fps
- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Compatible with GigE Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard.
- Support Windows、Linux
- 128 MB local memory for burst transmission and retransmission



**Applied range** • Defect Detection • Surface Patch Detection • Visual Positioning • Size Measuring • QR Code Reading • VR/AR • Logistics

| Camera                       | Mars1760S-66gm/gc  |
|------------------------------|--|
| Resolution [H*V]             | 1604 x 1100  |
| Sensor                       | Sony IMX432  |
| Sensor Size                  | 1.1"   |
| Sensor Technology            | Global, CMOS   |
| Pixel Size [ $\mu\text{m}$ ] | 9.0 x 9.0  |
| Frame Rate [fps]             | 66   |
| Data Bit                     | 12bit  |
| Exposure Time                | 1 $\mu\text{s}$ ~1s  |
| Dynamic Range                | 70dB   |
| Mono/Color                   | Mono/Color   |
| Image Format                 | Mono: Mono8/10/10Packed/12/12Packed<br>Color: Mono8,BayerRGB/10/10Packed,<br>BayerGB8/10/10Packed,YUV422Packed   |
| Interface                    | GigE   |
| Synchronization              | Via hardware trigger、software trigger or free run mode   |
| Programmable Control [ISP]   | Image resolution、RGB gain、Exposure time、Contrast ratio、Gamma form、Image rollovers、Raw、LUT、Black level correction |
| Housing Size [l*w*h]         | 29.0 x 44.0 x 58.0 mm (100g)   |
| Operating Temperature        | -30~70 ° C (Storage), 0~50° C (Working)  |
| Lenses Mount                 | C-Mount  |
| Digital I/O                  | Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1                |
| Power Input                  | DC 16-24V, Supporting POE  |
| Power Consumption            | 12V @ $\approx$ 3.2W   |
| Driver                       | Mars Series Camera Software Suite (iCentral) or 3rd party GigE Vision Software                                   |
| Operating System             | Windows, Linux   |
| Conformity                   | GigE Vision, GenICam   |

### Spectral Response

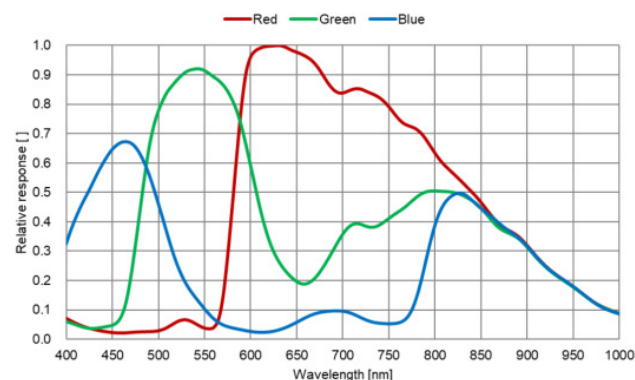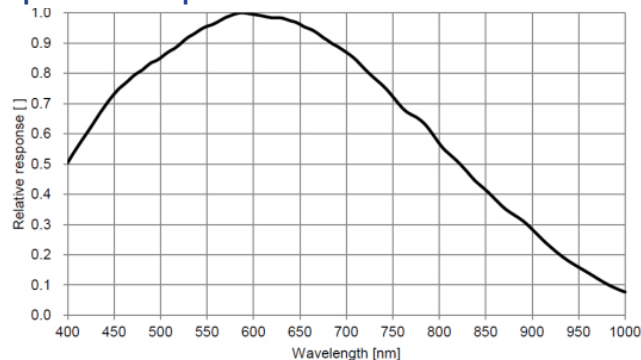

### Dimensions

