



Mars5000S-150cm/cc



- 5MP @150 fps
- Compatible with Cameralink protocol and GenICam standard
- Support triggering via CameraLink frame grabber
- Support Windows operating platform
- Support DC 24V power supply




Applied range • Printing • Textile • Railway • Logistics • Metallurgy • Food • Pharmaceutical • Material sorting

Camera	Mars5000S-150cm/cc
Resolution [H*V]	2448 x 2048
Sensor	Sony IMX250
Sensor Size	2/3"
Pixel Size [μm]	3.45 x 3.45
Frame Rate [fps]	150
Data Bit	10
Exposure Time	16μs~1s
Dynamic Range	70dB
Mono/Color	Mono / Color
Image Format	Monochrome: Mono8 Color: BayerRG8/BayerGB8
Interface	Cameralink
Synchronization	Via hardware trigger、software trigger or free run mode
Housing Size [l*w*h]	29.0 × 44.0 × 58.0 mm (100g)
Operating Temperature	-30~80 ° C (Storage), -30~50° C (Working)
Lenses Mount	C-Mount
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1
Power Input	PoCL, DC 6-24V
Power Consumption	12V@3.0W
Driver	Mars Series Camera Software Suite (iCentral) or 3rd Party Cameralink Protocol Software
Operating System	Windows
Conformity	Cameralink, GenICam

Spectral Response

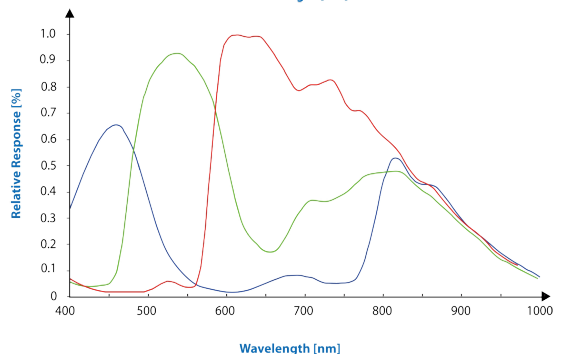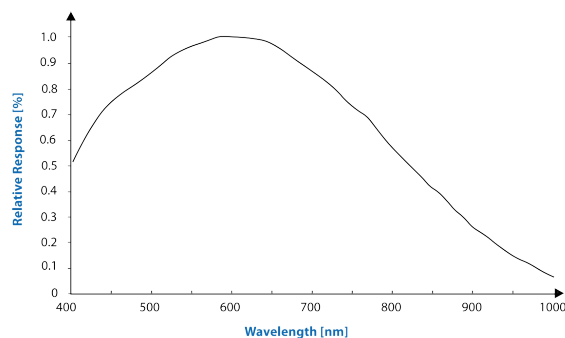

Dimensions

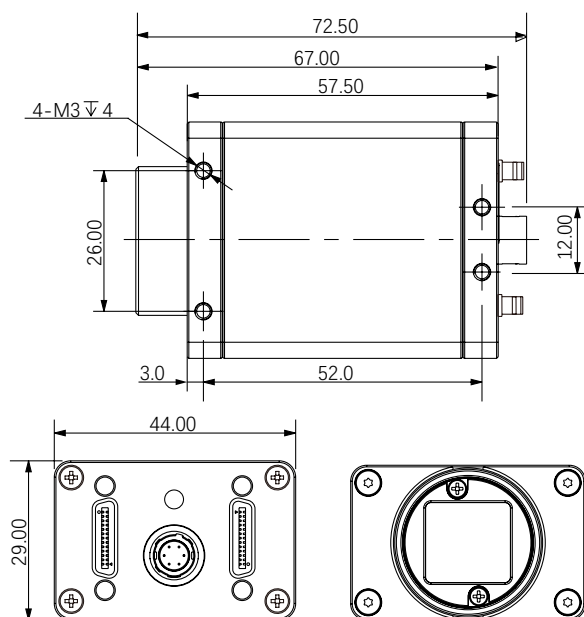

No.8, Xiyuan 9th Road West Lake District, Hangzhou 310030 China
Tel: 86-571-89712238 Web: www.contrastech.com
Email: market@contrastech.com