



- 2MP @60 fps
- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Compatible with GigE Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard
- Support Windows, Linux
- 256 MB local memory for burst transmission and retransmission




Applied range • Defect Detection • Surface Patch Detection • Visual Positioning • Size Measuring • QR Code Reading • VR/AR • Logistics

Camera	Mars2000S-60gm/gc
Resolution [H*V]	1624 x 1240
Sensor	Sony IMX430
Sensor Size	1/1.7"
Sensor Technology	Global, CMOS
Pixel Size [μm]	4.5 x 4.5
Frame Rate [fps]	60
Data Bit	10bit
Exposure Time	1 μs ~1s
Dynamic Range	60dB
Mono/Color	Mono/Color
Image Format	Mono: Mono8/10/10p Color: Mono8, BayerRG8/10/10P, YUV422_8_UYVY, YUV422_8
Interface	GigE
Synchronization	Via hardware trigger, software trigger or free run mode
Housing Size [l*w*h]	29.0 x 29.0 x 42.0 mm (88g)
Operating Temperature	-30~80 ° C (Storage), -30~50° C (Working)
Lenses Mount	C-Mount
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1
Power Input	DC 9-24V, Supporting PoE
Power Consumption	12V @ $\approx$ 3.8W
Driver	Mars Series Camera Software Suite (iCentral) or 3rd party GigE Vision Software
Operating System	Windows, Linux
Conformity	GigE Vision, GenICam

Spectral Response

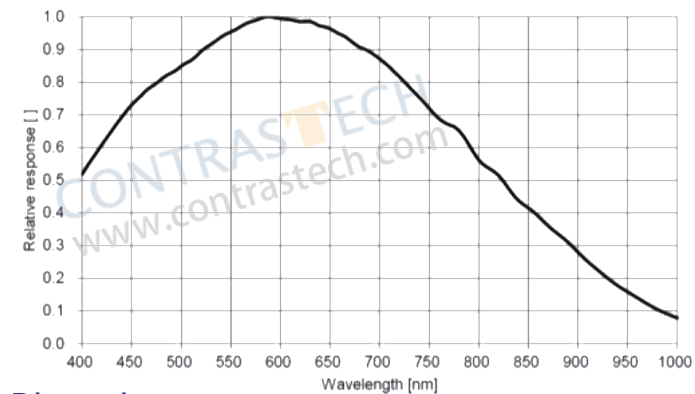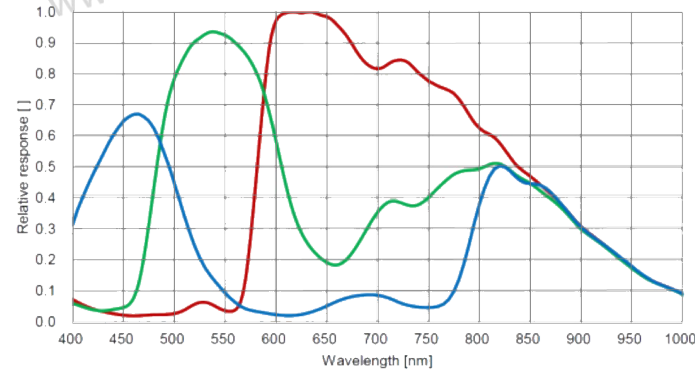

Dimensions

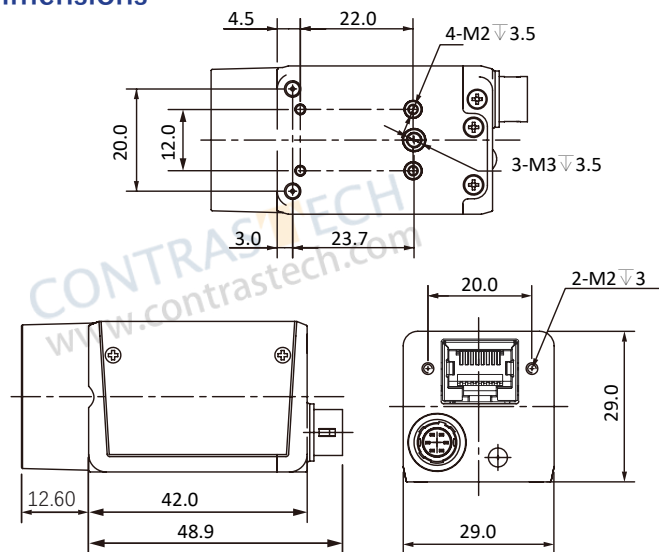

No.8, Xiyuan 9th Road West Lake District, Hangzhou 310030 China
Tel: 86-571-89712238 Web: www.contrastech.com
Email: market@contrastech.com